### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

### (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 6 October 2005 (06.10.2005)

**PCT** 

# (10) International Publication Number WO 2005/093204 A1

(51) International Patent Classification<sup>7</sup>: E21B 17/10, 17/22, 21/00

(21) International Application Number:

PCT/GB2005/001199

(22) International Filing Date: 24 March 2005 (24.03.2005)

(25) Filing Language:

English

(26) Publication Language:

English

GB

GB

(30) Priority Data:

0406782.3 26 March 2004 (26.03.2004) 0425663.2 23 November 2004 (23.11.2004)

(71) Applicant (for all designated States except US): DOWN-HOLE PRODUCTS PLC [GB/GB]; Badentoy Road, Badentoy Park, Portlethen, Aberdeen AB12 4YA (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KIRK, Ian, Alastair [GB/GB]; Lindos, 131 North Deeside Road, Milltimber,

Aberdeen AB13 0JF (GB). **BARRON, William** [GB/GB]; 27 Baillieswells Road, Bieldside, Aberdeen AB15 9BL (GB). **CLARK, Alistair, Bertram** [GB/GB]; 7 Westwood Grove, Westhill, Aberdeen AB32 6XF (GB).


(74) Agent: MURGITROYD & COMPANY; 165-169 Scotland Street, Glasgow G5 8PL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: DOWNHOLE APPARATUS FOR MOBILISING DRILL CUTTINGS

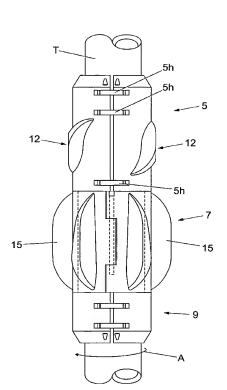

(57) Abstract: Apparatus for mobilising drill cuttings in a well, comprising at least one vane (12), and two or more blades (15). The two or more blades (15) define at least one fluid conduit between adjacent blades (15). The blades (15) and the or each vane (12) are rotatable relative to one another. The apparatus is provided to alleviate the problem of drill cuttings clumping together downhole. The or each vane (12) can be provided on a sleeve (5). The blades (15) can be mounted on a bushing (7) that is rotatably mounted on the sleeve (5).

## WO 2005/093204 A1

GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

### **Published:**

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.